




**CE103**

## Thermal Control Process Apparatus

**Compact, self-contained, bench-mounting apparatus to study basic and advanced principles of thermal control**

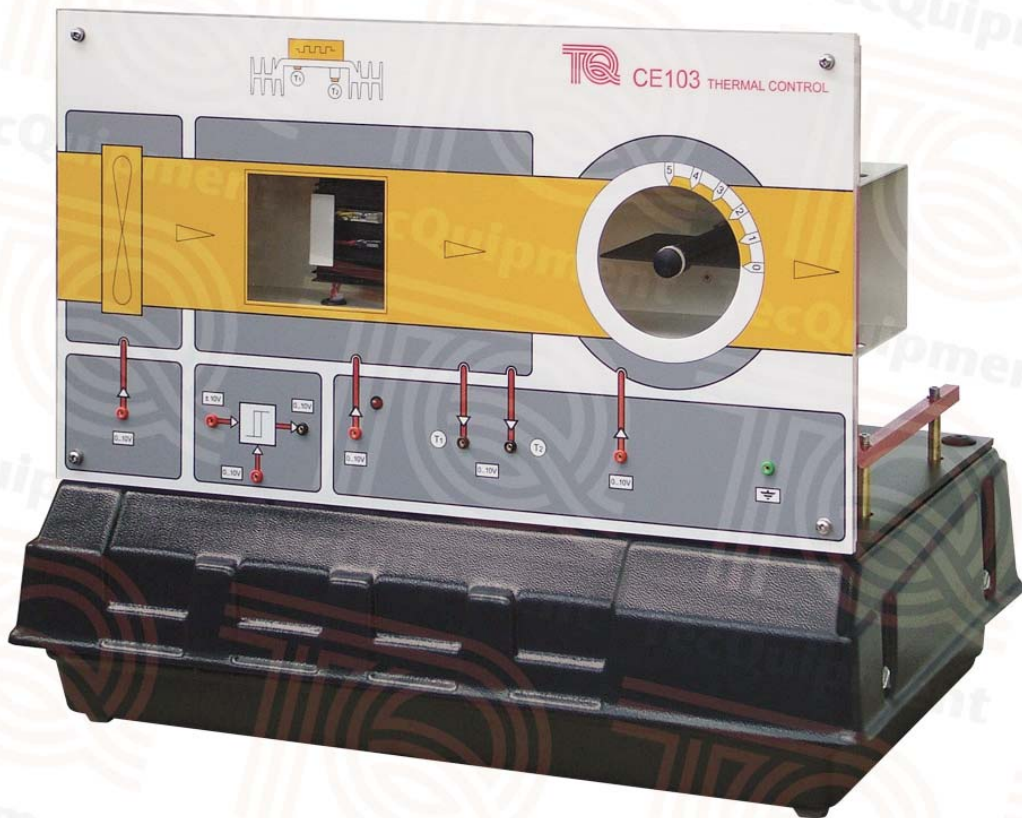

- Self-contained and compact bench-mounting unit
- Electrically-heated and air-cooled model process that mimics a real industrial process
- Includes variable hysteresis for advanced process control experiments
- Temperature sensors with different thermal contact to the process give variations in thermal inertia and time constant
- Front panel includes mimic diagram of the process so students can clearly see what they are controlling
- All inputs and outputs buffered for connection to TecEquipment's optional controllers or other suitable controllers

- TecEquipment Ltd, Bonsall Street, Long Eaton, Nottingham NG10 2AN, UK
- **T** +44 115 972 2611 • **F** +44 115 973 1520 • **E** info@tecequipment.com • **W** www.tecequipment.com
- An ISO 9001 certified company

# CE103

## Thermal Control Process Apparatus

### Description

The Thermal Control Process Apparatus mimics a common industrial process, including an air-conditioning plant, where a combination of adjustments can control temperature. These can be:

- Varying the heat energy input to the system
- Varying the speed of a circulating fan
- Using a variable vane to restrict the flow

The apparatus has a variable-speed fan that forces air through a duct. In the duct is an electrically-heated process block. A balance of the heat gained from electrical heating and heat lost by convection and conduction gives a steady temperature at the block.

Two temperature sensors measure the temperature of the block. One sensor is in direct thermal contact with the block. The other sensor mounts on an insulating spacer to introduce thermal inertia and variable-time constants into the control loop. A servo-driven vane, mounted after the fan and the process block, creates a variable restriction downstream for more advanced experiments.

The control problem is to keep the process temperature within acceptable limits while it works under various conditions. A combination of regulating the electrical energy to the heater coil, varying the air flow rate and rotating the vane gives the heat control.

A relay amplifier with variable hysteresis allows more advanced experiments.

The Thermal Control Process Apparatus contains the drive power supplies for the fan, vane servo and heater circuits, and the signal conditioning circuits for the sensors.

The user guide supplied contains a detailed description of the apparatus, theory and a set of experiments. The experiments show practical application and setting up of process controllers. The experiments also compare transient response to frequency response. The apparatus has scaled-down time constants for shorter laboratory time.

The CE103 includes a set of cables and connectors for connection to other equipment. All control connections work with 0 to 10 VDC signals.

### Standard Features

- Supplied with comprehensive user guide
- Five-year warranty
- Made in accordance with the latest European Union directives

### Experiments

- Heat transfer
- ON/OFF control – experiment includes investigation of overshoot and undershoot, ON and OFF time ratio, rates of heating and cooling, offset and hysteresis
- Proportional, proportional + integral, or proportional + integral + differential control
- Frequency response of model process
- Thermal inertia and variable-time constants
- Multi-variable control – up to three variables can be monitored and individually controlled

The flexible design of the equipment allows the user to develop many other analysis and control exercises to suit their needs. It is good for extended or advanced control experiments, and is ideal for student project work.

### Essential Base Unit:

- Controller (CE120) – A controller with analogue and digital controls and instruments **or**
- Digital Interface (CE122) – An interface which connects between most products in the Control Engineering range and a suitable computer (not included) **or**
- Other suitable controller with 10 V inputs and outputs

Both the CE120 and the CE122 include TecEquipment's CE2000 Control Software (see separate datasheet) with editable, pre-made control experiments for use with the CE103.

### Essential Services

*Electrical supply:*

240/110 VAC, 1 A, 50/60 Hz, with earth

Other voltages and frequencies available to special order

*Bench space needed:*

1 m x 750 mm

### Operating Conditions

*Operating environment:*

Laboratory

*Storage temperature range:*

-25°C to +55°C (when packed for transport)

*Operating temperature range:*

+5°C to +40°C

*Operating relative humidity range:*

80% at temperatures < 31°C decreasing linearly to 50% at 40°C

### Sound Levels

Less than 70 dB(A)

- TecEquipment Ltd, Bonsall Street, Long Eaton, Nottingham NG10 2AN, UK
- **T** +44 115 972 2611 • **F** +44 115 973 1520 • **E** info@tecquipment.com • **W** www.tecquipment.com
- An ISO 9001 certified company

# CE103

## Thermal Control Process Apparatus

### Specifications

*Nett dimensions:*

540 mm x 330 mm x 420 mm and 17 kg

*Packed dimensions:*

0.34m<sup>3</sup> and approximately 41 kg

*Inputs: 0 to 10 VDC*

- Fan speed
- Heater
- Vane position
- Hysteresis relay input: 0 to +/- 10 VDC
- Hysteresis relay control

*Outputs: 0 to 10 VDC*

- Temperature Sensor 1: direct contact
- Temperature Sensor 2: on insulating spacer
- Hysteresis relay output

*tradition.*

*innovation.*

*integration.*

**infoWERK** is a leading expert in the development of eLearning courseware, learning system solutions, teaching and AV equipment.

**Furthermore infoWERK is the representative and system integrator of "TecQuipment".**

**TecQuipment** is one of the global leaders in technical teaching equipment for engineering. If you are interested in one of TecQuipment's products feel free to contact us at:



**infoWERK Medien & Technik GmbH**

**Martinsbühel 6 / A-6170 Zirl / Austria**

Phone: +43 (0) 5238 52099-0 / Fax: +43 (0) 5238 52099-40

E-Mail: [info@infowerk.at](mailto:info@infowerk.at) / Website: [infowerk.at](http://infowerk.at)

**Otto-Dürr-Straße 25**

**D-70435 Stuttgart, Zuffenhausen/ Germany**

Phone: +49 (0) 711 342471-0 / Fax: +49 (0) 711 342471-11

E-Mail: [info@de.infowerk.at](mailto:info@de.infowerk.at) / Website: [infowerk.at](http://infowerk.at)