


CE109**Ball and Hoop Apparatus**

Compact, self-contained, bench-mounting apparatus to study basic and advanced principles of control of a ball in a hoop

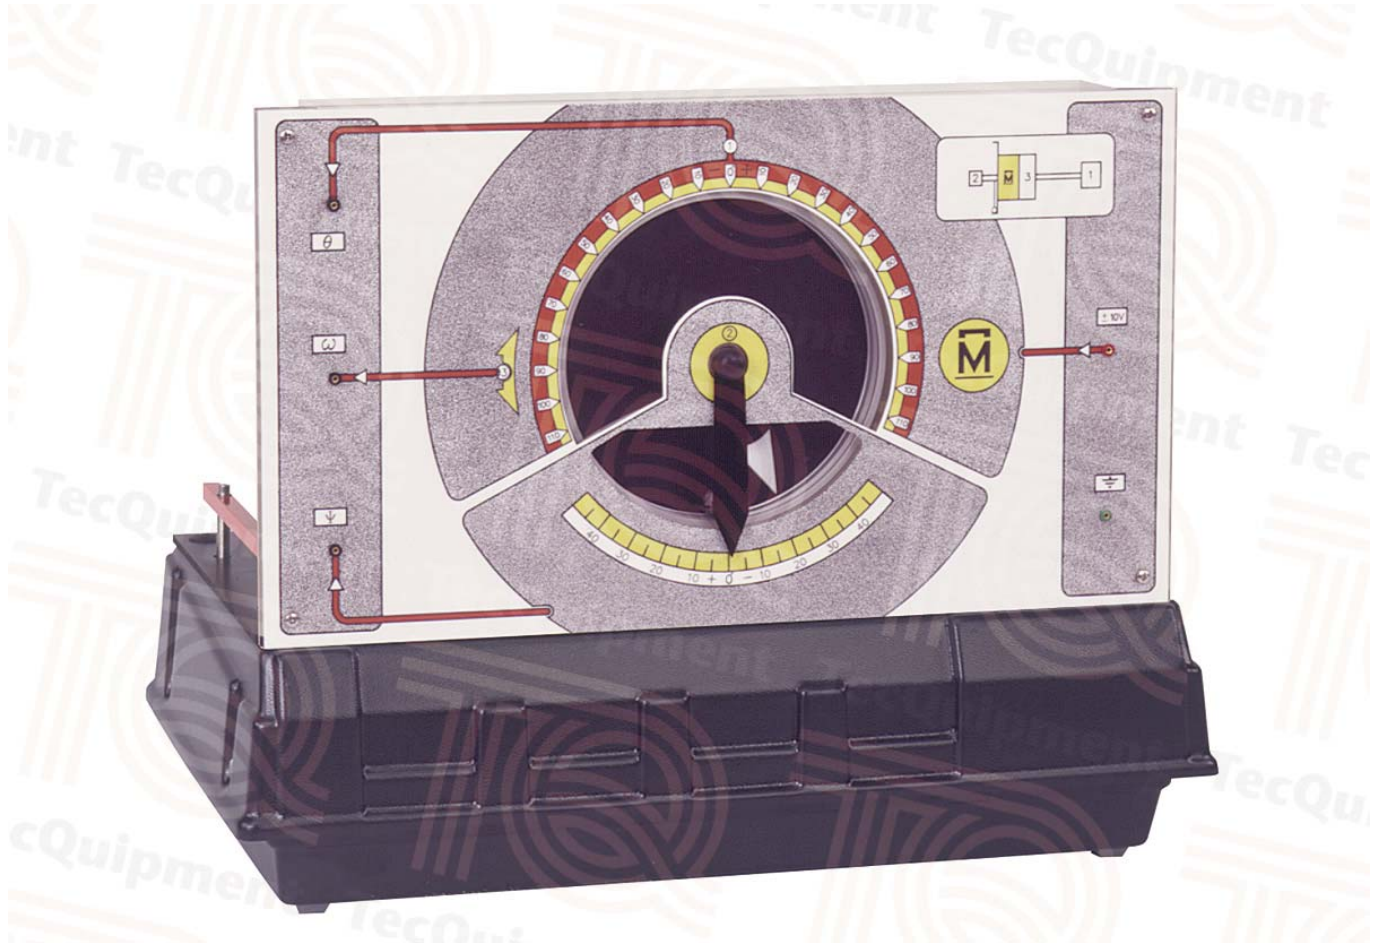

- Self-contained and compact bench-mounting unit
- Ideal for classroom demonstrations and student project work
- Shows the problems of speed and position control of a mobile body or liquid in a container
- Mimics industrial, aeronautical, fluid transport and pumping system problems with realistic results
- All inputs and outputs buffered for connection to TecQuipment's optional controllers or other suitable controllers
- Front panel includes a mimic diagram of the process so that students can clearly see what they are controlling
- Shows basic control of position or speed, and advanced studies of liquid slop

- TecQuipment Ltd, Bonsall Street, Long Eaton, Nottingham NG10 2AN, UK
- T +44 115 972 2611 • F +44 115 973 1520 • E info@tecquipment.com • W www.tecquipment.com
- An ISO 9001 certified company

CE109

Ball and Hoop Apparatus

Description

The CE109 Ball and Hoop Apparatus shows the use of electromechanical servo systems for position and velocity control. It also works as a model to show liquid slop problems, for example: aircraft missile fuel storage, fuel tankers and industrial pumping systems.

The apparatus has a steel ball that rolls inside a hoop. The hoop is free to rotate, but controlled by a servomotor. Transducers give outputs of the hoop and ball positions.

When the hoop is under angular position control, the ball moves like a cylindrical pendulum. This allows students to use it as a model for the study of liquid slop dynamics.

Advanced studies cover:

- The influence of liquid slop behaviour on vehicle control system design
- The use of 'pole zero' in the analysis of control systems

Note: You must use the CE109 with TecEquipment's optional CE120 Controller, the optional CE122 Digital Interface, or other suitable controllers with 10 V inputs and outputs. Details of the CE120 and CE122 are on separate datasheets.

The CE109 includes a set of cables and connectors for connection to other equipment.

All control connections work with 0 to 10 VDC signals.

TecEquipment recommend that you use the optional Tachometer (OT1) for experiments in calibration of hoop velocity. Also, if you are not using the optional software, then an oscilloscope (OS1) will help to analyse the transient signals in some experiments.

Essential Base Unit

- Controller (CE120) – A controller with analogue and digital controls and instruments
or
- Digital Interface (CE122) – An interface which connects between most products in the Control Engineering range and a suitable computer (not included)
or
- Other suitable controller with 10 V inputs and outputs
Both the CE120 and the CE122 include TecEquipment's CE2000 Control Software (see separate datasheet) with editable, pre-made control experiments for use with the CE109.

Standard Features

- Supplied with comprehensive user guide
- Five-year warranty
- Made in accordance with the latest European Union directives

Experiments

- The design and analysis of servo control systems for position and velocity control
- The analysis and modelling of liquid slop dynamics
- The use of 'pole zero' in the analysis of control systems

The flexible design of the equipment allows the user to develop many other analysis and control exercises to suit their needs. It is good for extended or advanced control experiments, and is ideal for student project work.

Recommended Ancillaries

Optical Tachometer (OT1)

Oscilloscope (OS1)

Essential Services

Electrical supply:

90 VAC to 250 VAC, 1 A, 50 Hz to 60 Hz, with earth

Bench space needed:

1 m x 750 mm

Operating Conditions

Operating environment:

Laboratory

Storage temperature range:

-25°C to +55°C (packed)

Operating temperature range:

+5°C to +40°C

Operating relative humidity range:

80% at temperatures < 31°C decreasing linearly to 50% at 40°C

Sound Levels

Less than 70 dB(A)

Specifications

Nett dimensions and weight:

540 mm x 330 mm x 420 mm, 18.7 kg

Packed dimensions and weight:

0.3 m³, 41 kg (approx – packed for export)

Inputs: 0 to 10 VDC

- Motor drive signal: 0 to +/- 10 VDC

Outputs: 0 to 10 VDC

- Hoop angle: 0 to +/- 10 VDC
- Hoop velocity
- Ball position

tradition.

innovation.

integration.

infoWERK is a leading expert in the development of eLearning courseware, learning system solutions, teaching and AV equipment.

Furthermore infoWERK is the representative and system integrator of "TecQuipment".

TecQuipment is one of the global leaders in technical teaching equipment for engineering. If you are interested in one of TecQuipment's products feel free to contact us at:



infoWERK Medien & Technik GmbH

Martinsbühel 6 / A-6170 Zirl / Austria

Phone: +43 (0) 5238 52099-0 / Fax: +43 (0) 5238 52099-40

E-Mail: info@infowerk.at / Website: infowerk.at

Otto-Dürr-Straße 25

D-70435 Stuttgart, Zuffenhausen/ Germany

Phone: +49 (0) 711 342471-0 / Fax: +49 (0) 711 342471-11

E-Mail: info@de.infowerk.at / Website: infowerk.at