



Fluid Mechanics


MFP104

Reciprocating Compressor Module


Allows students to study and perform tests on a reciprocating compressor: to understand how it works and calculate its performance

Works with
VDAS®

Screenshot of the optional VDAS® software

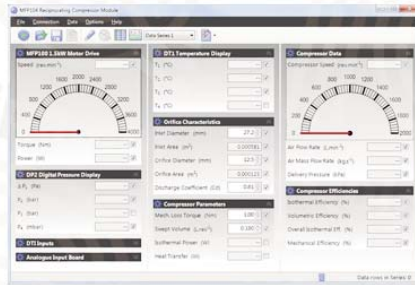

Shown fitted with the Universal Dynamometer

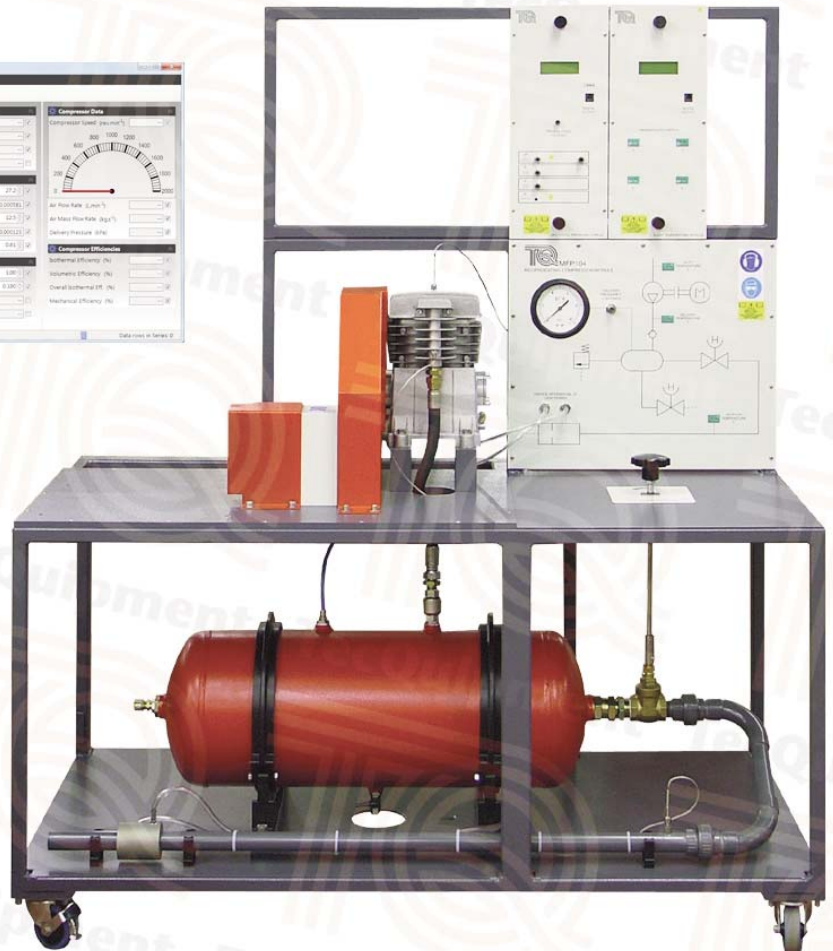

- Reciprocating compressor and air receiver mounted in a mobile frame with full instrumentation
- Part of TecEquipment's Modular Fluid Power range which connects with the Universal Dynamometer (MFP100) as a common motive power source for a cost-effective solution
- Allows students to study and test a popular fluid power machine
- Temperature and pressure measurements at key points in the system
- Connection plate with schematic diagram clearly shows how parts of the module connect together
- Fully variable speed, for range of test results
- Includes digital displays of temperature and pressure
- Can connect to TecEquipment's Versatile Data Acquisition System (VDAS®) and software

- TecEquipment Ltd, Bonsall Street, Long Eaton, Nottingham NG10 2AN, UK
- T +44 115 972 2611 • F +44 115 973 1520 • E info@tecquipment.com • W www.tecquipment.com
- An ISO 9001 certified company
- VDAS is a registered trademark of TecEquipment Ltd



MFP104

Reciprocating Compressor Module

Description

For use with and driven by the Universal Dynamometer (MFP100, available separately), the Reciprocating Compressor Module is part of TecQuipment's Modular Fluid Power range. It is ideal for student experiments, demonstrations and projects.

Reciprocating compressors are common machines that provide compressed air for machines and tools. These can be air tools (saws, sanders and screwdrivers), paint spray equipment, pneumatic actuators and control systems.

The module includes a small compressor with an air receiver and instrumentation, all mounted on a robust, mobile trolley for ease of use. The separate Universal Dynamometer (MFP100) measures the speed, torque and power absorbed by the compressor. Speed is fully variable up to the maximum allowable for the compressor. Air enters the compressor, which then delivers it under pressure to the receiver. A valve releases pressure from the receiver to atmosphere through an orifice. The valve sets the pressure in the receiver and hence the flow rate; the orifice allows an accurate measurement of the mass flow rate of the outlet air. These values help students to discover how the compressor flow rate relates to the pressure delivered by the compressor.

Thermocouples measure temperatures at the inlet and delivery of the compressor, and upstream of the orifice. Electronic transducers measure the delivery pressure, nozzle differential pressure (flow rate) and the atmospheric (barometric) pressure. Also, for safety and good engineering standards, a Bourdon gauge shows the vessel pressure, even if the mains electricity fails. Digital displays show all the important pressures and temperatures.

For quick and reliable tests, TecQuipment can supply its optional Versatile Data Acquisition System (VDAS®). This gives accurate real-time data capture, monitoring and display, calculation and charting of all the important readings on a computer (computer not included).

Standard Features

- Supplied with comprehensive user guide
- Five-year warranty
- Made in accordance with the latest European Union directives

Experiments

- Energy balance for a compressor
- Variation of compressor performance with pressure
- Variation of compressor performance with speed
- Mechanical, volumetric and isothermal efficiencies
- Thermodynamics of a compressor

Essential Base Unit

- Universal Dynamometer (MFP100)

Recommended Ancillaries

- VDAS-F (frame-mounted version of the Versatile Data Acquisition System)

Essential Services

Electrical supply (for the Universal Dynamometer):

Single-phase 230 VAC, 50 Hz at 20 A

Two-phase 220 VAC, 60 Hz at 20 A

Floor space needed:

2 m x 1.5 m

- TecQuipment Ltd, Bonsall Street, Long Eaton, Nottingham NG10 2AN, UK
- **T** +44 115 972 2611 • **F** +44 115 973 1520 • **E** info@tecquipment.com • **W** www.tecquipment.com
- An ISO 9001 certified company
- VDAS is a registered trademark of TecQuipment Ltd

MFP104

Reciprocating Compressor Module

Operating Conditions

Operating environment:

Laboratory

Storage temperature range:

-25°C to +55°C (when packed for transport)

Operating temperature range:

+5°C to +40°C

Operating relative humidity range:

80% at temperatures < 31°C decreasing linearly to 50% at 40°C

Specification

Nett dimensions (assembled):

1400 mm (length) x 1700 mm (height) x 750mm (depth)

Nett weight (without the Universal Dynamometer):

175 kg

Packed dimensions:

1.26 m³

Packed weight:

Approximately 250 kg

Power:

1.5 kW (from Universal Dynamometer)

Free air delivery:

Approximately 200 L.min⁻¹ at 1000 rev.min⁻¹

Number of cylinders:

Two

Maximum pressure:

6 bar (controlled by pressure-relief valve)

Pressure rating of vessel:

10 bar

Instruments and measurements:

- Temperatures: Thermocouples and digital display
- Pressures: Piezoelectric transducers and digital display (plus Bourdon gauge of vessel pressure for reference)
Note: Both the digital display units are electrically powered from outlets on the motor drive and display unit of the Universal Dynamometer
- Flow rate: orifice and differential pressure transducer
- Torque, speed and power: shown by the digital display of the Universal Dynamometer (MFP100)

- TecEquipment Ltd, Bonsall Street, Long Eaton, Nottingham NG10 2AN, UK
- **T** +44 115 972 2611 • **F** +44 115 973 1520 • **E** info@tecequipment.com • **W** www.tecequipment.com
- An ISO 9001 certified company
- VDAS is a registered trademark of TecEquipment Ltd

tradition.

innovation.

integration.

infoWERK is a leading expert in the development of eLearning courseware, learning system solutions, teaching and AV equipment.

Furthermore infoWERK is the representative and system integrator of "TecQuipment".

TecQuipment is one of the global leaders in technical teaching equipment for engineering. If you are interested in one of TecQuipment's products feel free to contact us at:



infoWERK Medien & Technik GmbH

Martinsbühel 6 / A-6170 Zirl / Austria

Phone: +43 (0) 5238 52099-0 / Fax: +43 (0) 5238 52099-40

E-Mail: info@infowerk.at / Website: infowerk.at

Otto-Dürr-Straße 25

D-70435 Stuttgart, Zuffenhausen/ Germany

Phone: +49 (0) 711 342471-0 / Fax: +49 (0) 711 342471-11

E-Mail: info@de.infowerk.at / Website: infowerk.at